


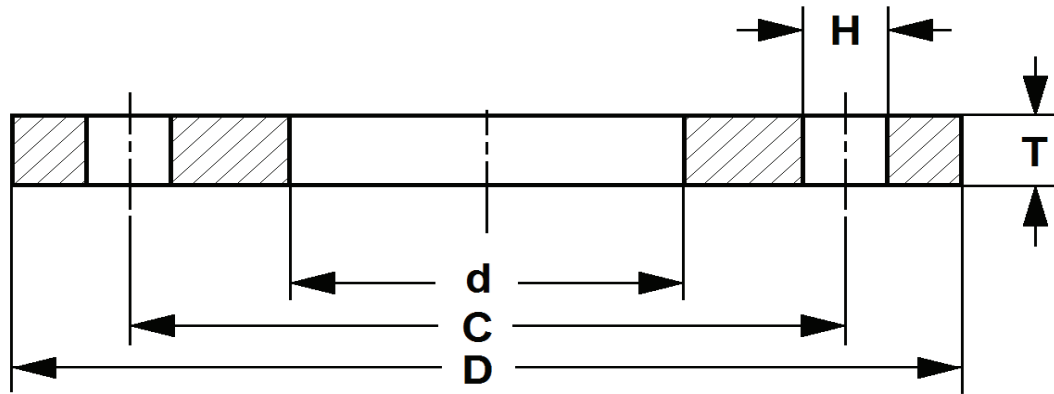

5K							
DN	d	D	C	T	H	No	PESO/Weight
10A	17,8	75	55	9	12	4	0,27
15A	22,2	80	60	9	12	4	0,30
20A	27,7	85	65	10	12	4	0,37
25A	34,5	95	75	10	12	4	0,45
32A	43,2	115	90	12	15	4	0,78
40A	49,1	120	95	12	15	4	0,83
50A	61,1	130	105	14	15	4	1,07
65A	77,1	155	130	14	15	4	1,49
80A	90,0	180	145	14	19	4	1,99
100A	115,4	200	165	16	19	8	2,39
125A	141,2	235	200	16	19	8	3,23
150A	166,6	265	230	18	19	8	4,41
200A	218,0	320	280	20	23	8	6,33
250A	269,5	385	345	22	23	12	9,45
300A	321,0	430	390	22	23	12	10,00

10K							
DN	d	D	C	T	H	No	PESO/Weight
10A	17,8	90	65	12	15	4	0,52
15A	22,2	95	70	12	15	4	0,57
20A	27,7	100	75	14	15	4	0,73
25A	34,5	125	90	14	19	4	1,13
32A	43,2	135	100	16	19	4	1,48
40A	49,1	140	105	16	19	4	1,56
50A	61,1	155	120	16	19	4	1,88
65A	77,1	175	140	18	19	4	2,60
80A	90,0	185	150	18	19	8	2,61
100A	115,4	210	175	18	19	8	3,14
125A	141,2	250	210	20	23	8	4,77
150A	166,2	280	240	22	23	8	6,34
200A	218,0	330	290	22	23	12	7,53
250A	269,5	400	355	24	25	12	12,70
300A	321,0	445	400	24	25	16	13,80

Disponible en acero al carbono SS400 y acero inoxidable 304L.

Available in carbon steel SS400 and stainless steel 304L.